




TRADITION + INNOVATION = FUTURE



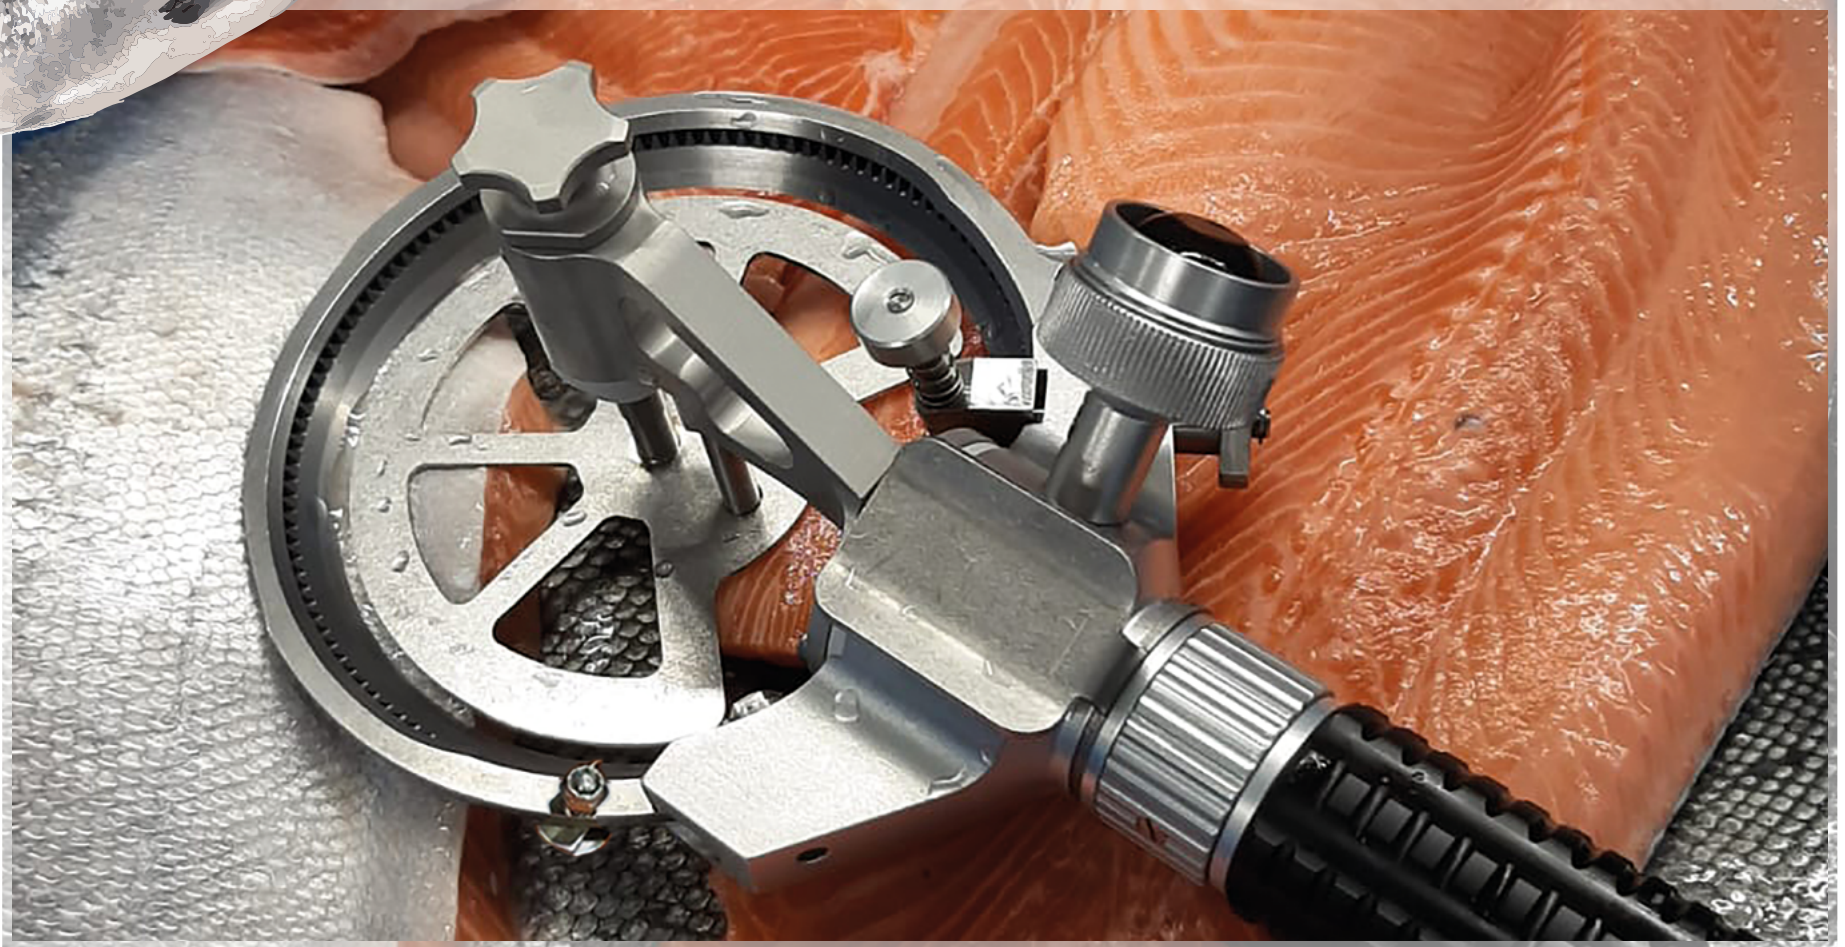


TRIMS FROM A-F
EFFECTIVE
CONTROLLED
MAXIMUM YIELD


CLEAN & TIDY CUT DUE TO DEPTH CONTROL

The modular design of our trimmers allows you to choose from five different blade types in the five diameters 35, 52, 69, 90 and 128 mm.

You can choose from optional features such as an ergonomic thumb rest, a cutting depth control in a robust and hygienic stainless steel design and many more.

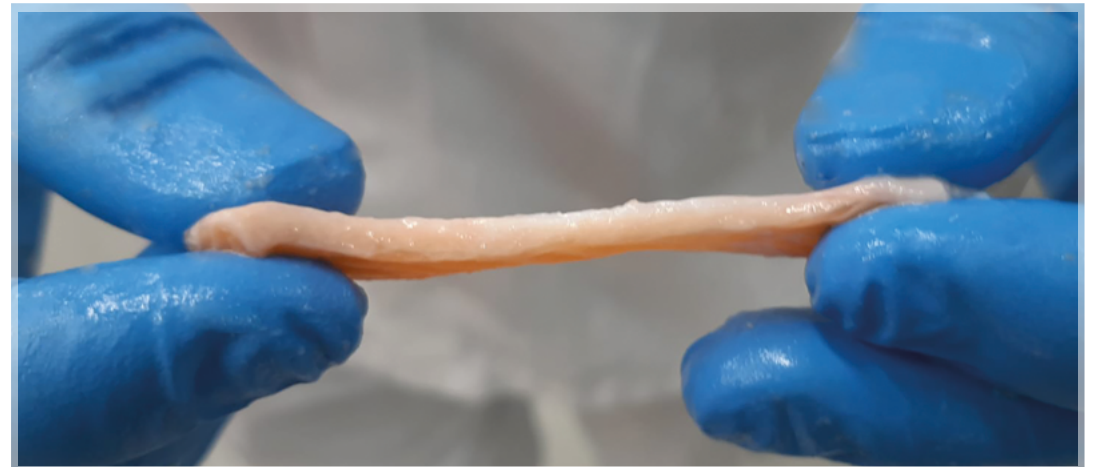



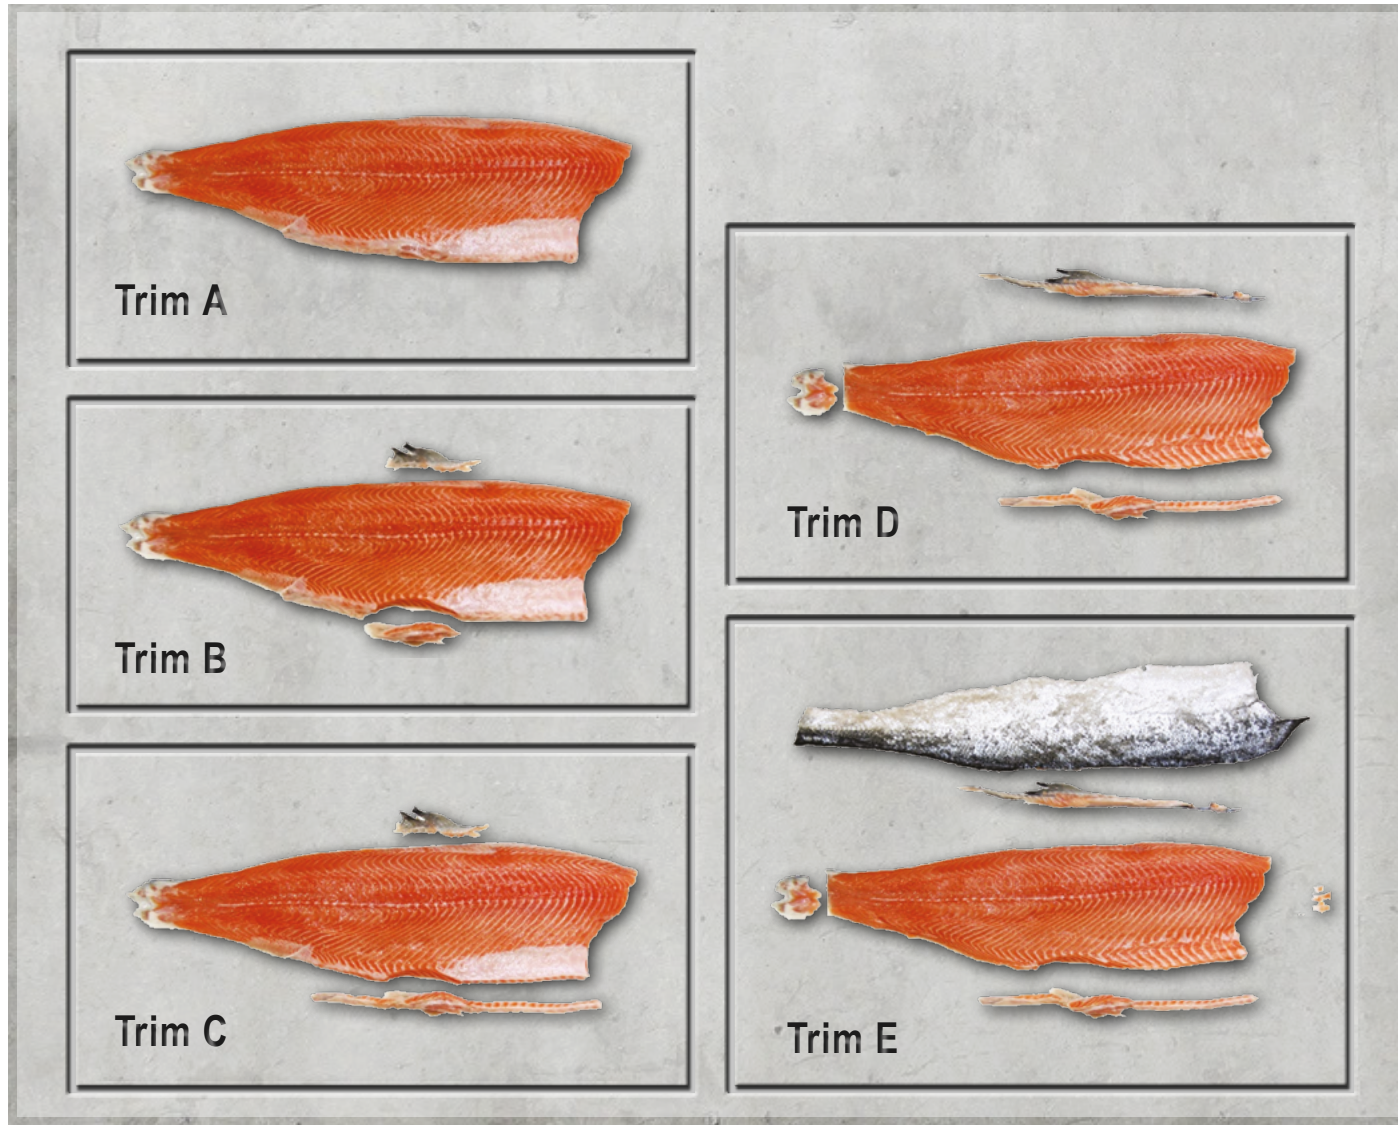


SUITABLE FOR ALL TYPES OF TRIM!


With our trimmers you can perform any trim with high yields on the fillet. Winter damage can be removed effectively, cleanly, quickly and with minimal loss.

With a choice of electrically or pneumatically operated trimmers, we offer you the right hand tool for the diverse requirements on your farm. Suitable for all types of trim!

MORE PROFIT THROUGH HIGHER YIELD!

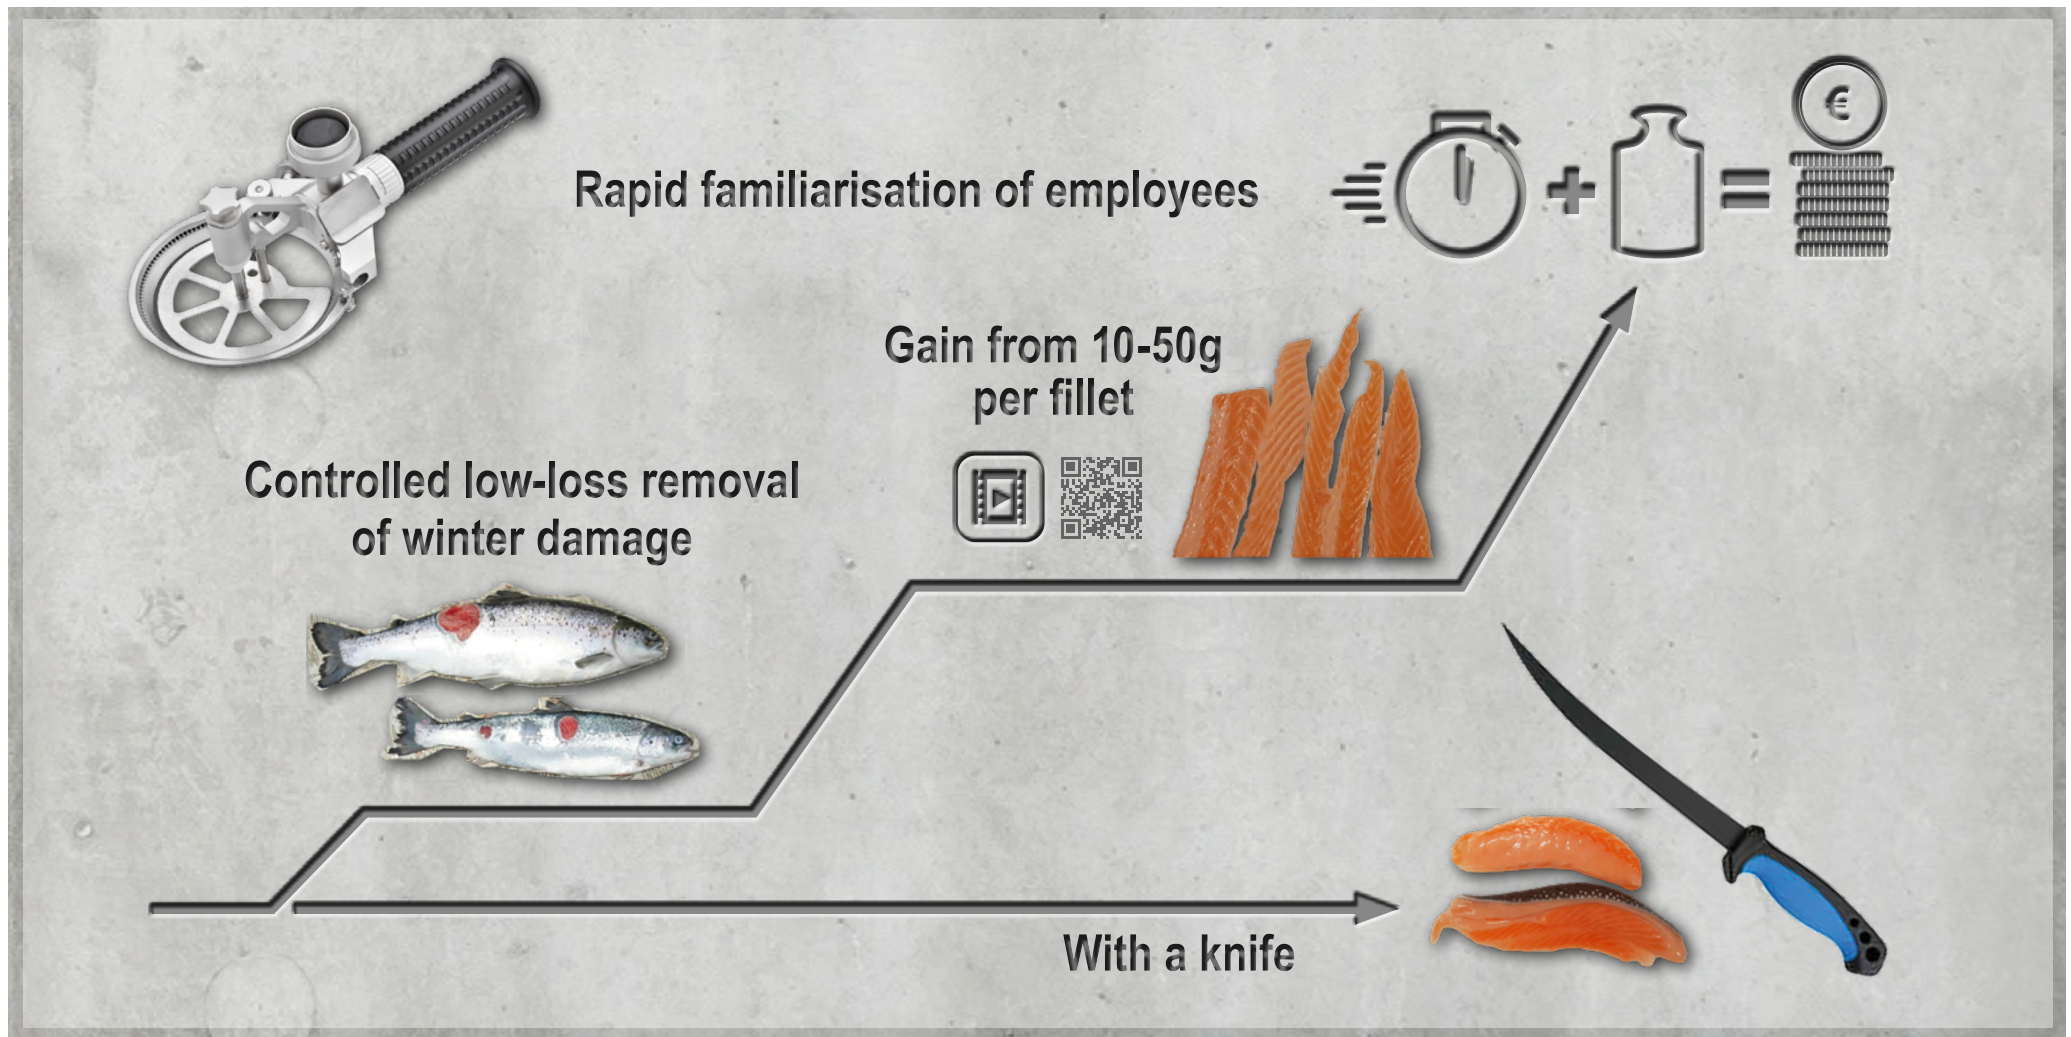



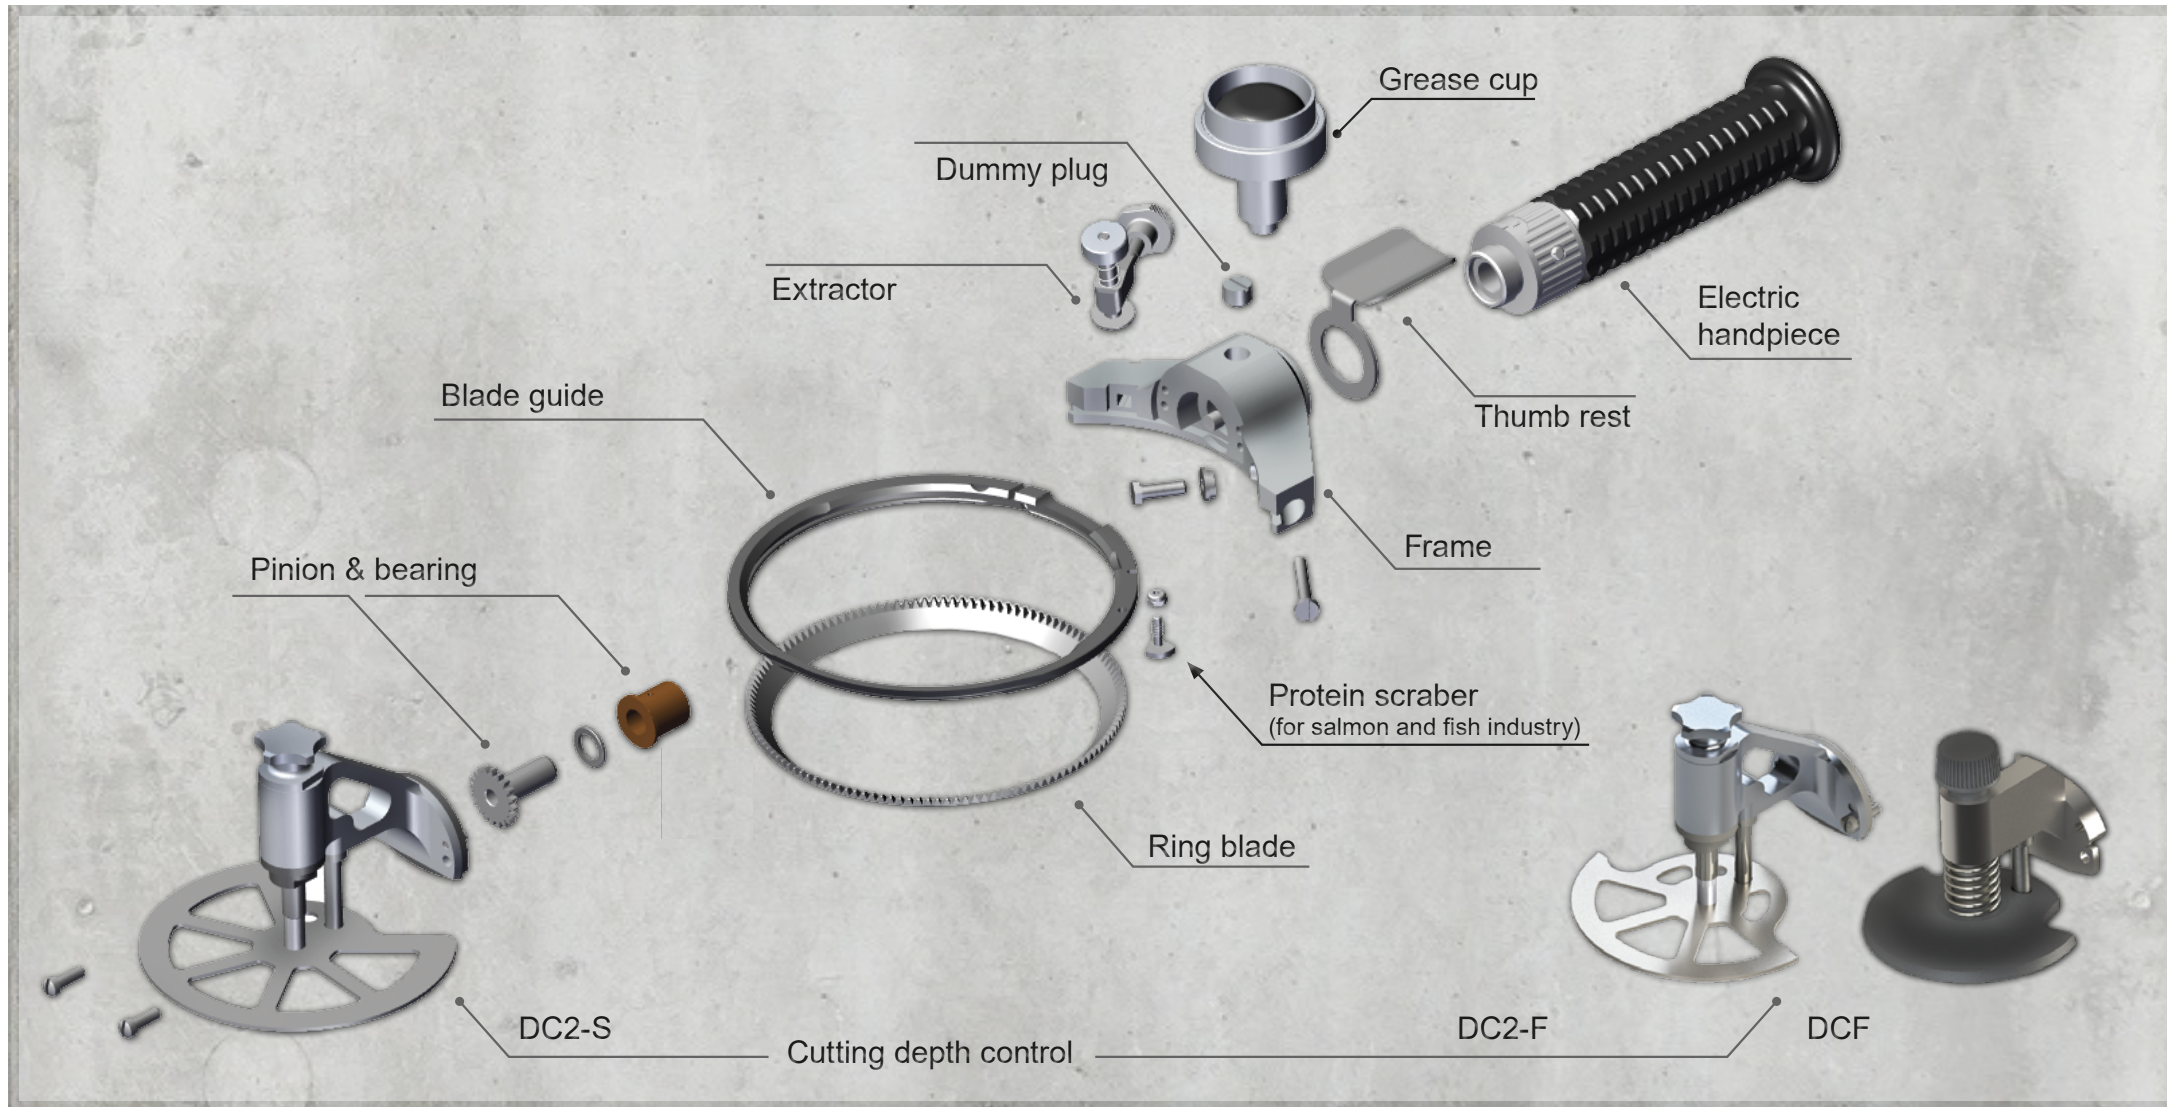

WIDE CHOICE OF CONFIGURATION OPTIONS

Ring knife profiles


■A (straight)



■B (Hook)



■C (flat short)




30°




45°

■D (flat lng)



	Ø (mm)	35	52	69	90	128
A (straight)		•	•	•	•	
B (hook)		•	•	•	•	
C (short flat)					•	•
D (long flat)						•
Depth control					DCF / DCS	DC2F / DC2S
Pinion gear and Bushing		small	small	small	large	large
Thumb rest		•	•	•	•	•
Grease cup		small/large	small/large	small/large	small/large	small/large
Steeling device only					•	•
Pneumatic-motor PNM2		•	•	•	•	•
Start-stop safety system		•	•	•	•	•
Grease fitting and vacuum suction system		•	•			

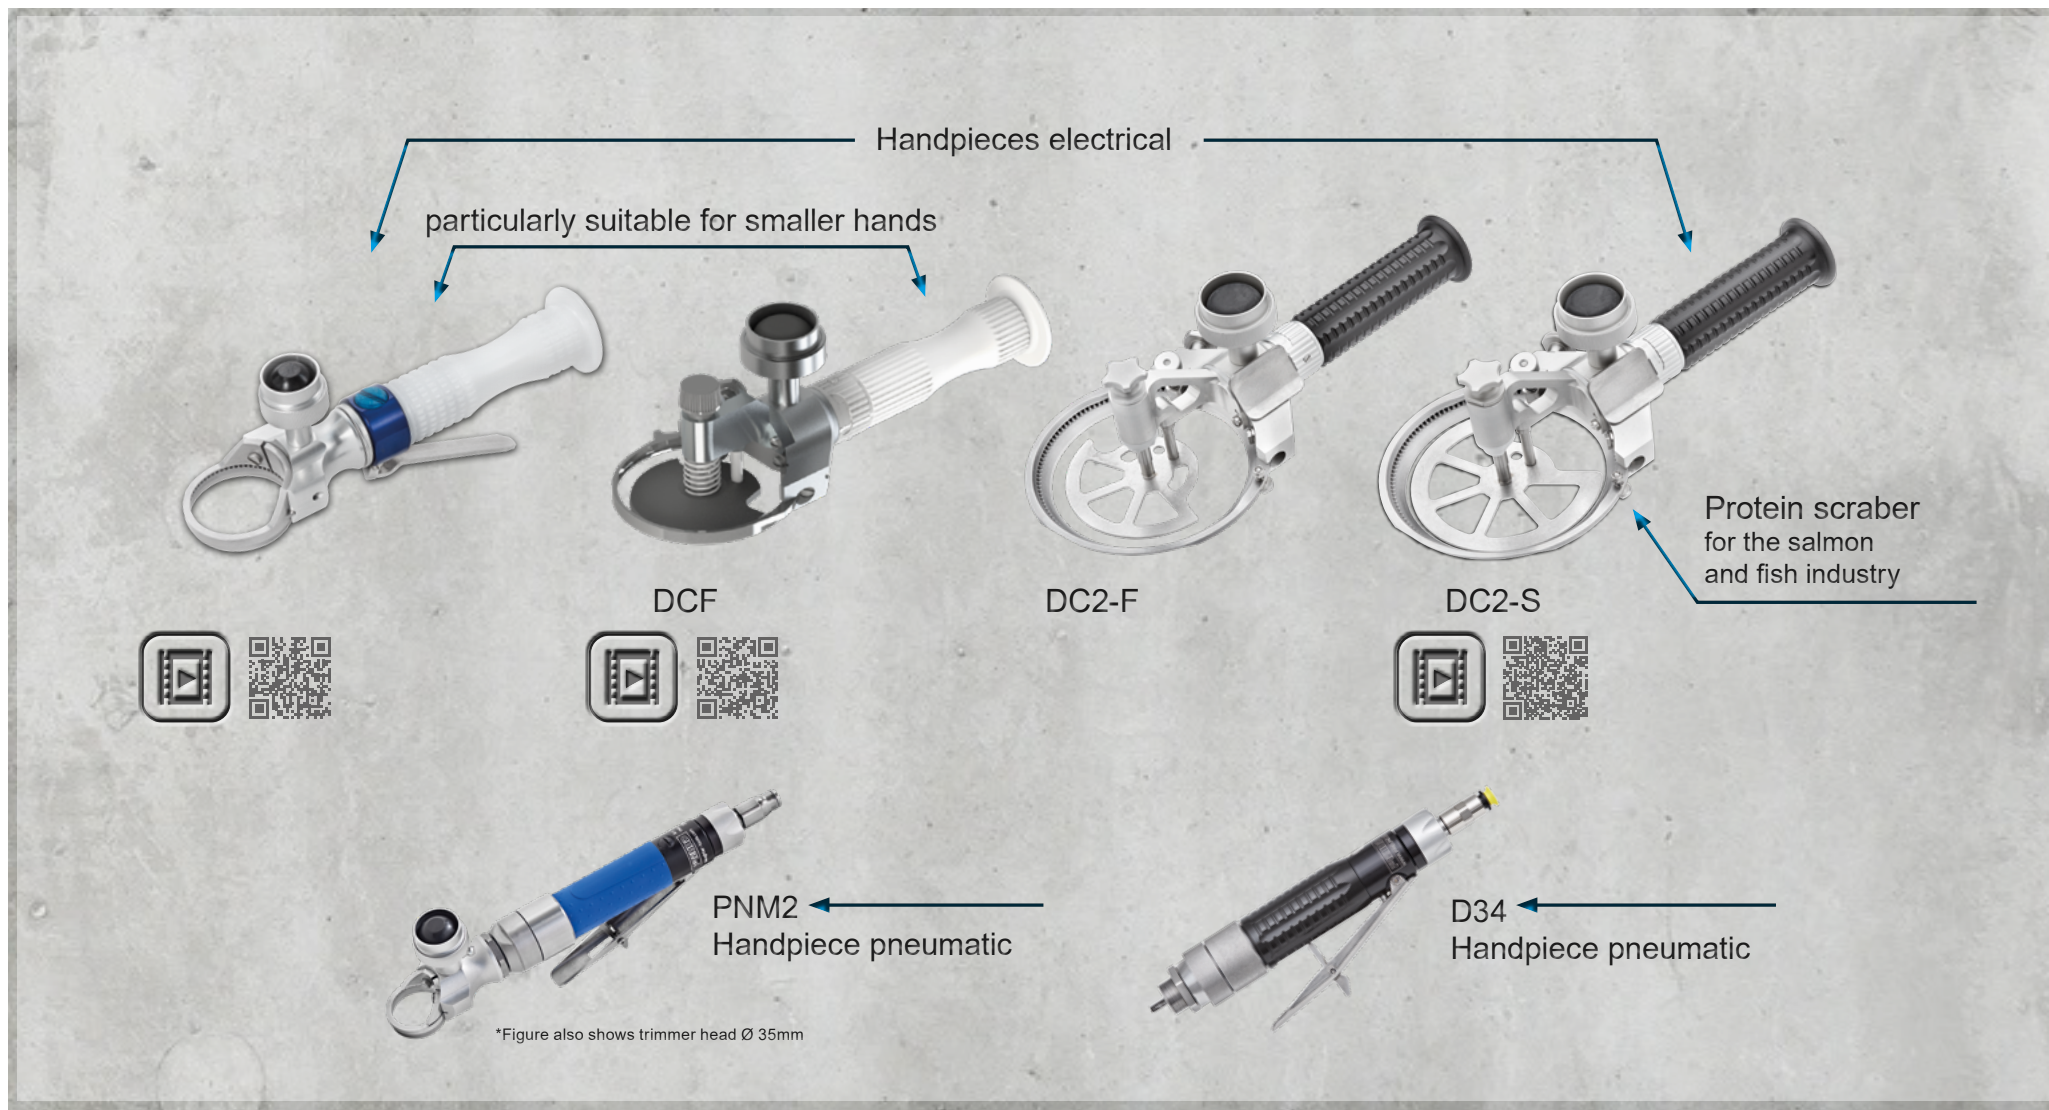



<https://www.leroyseafood.com/sv/om-leroy/fran-fjord-till-bord/>

Ø 35mm




Ø 52mm



Ø 69mm



Ø 90mm

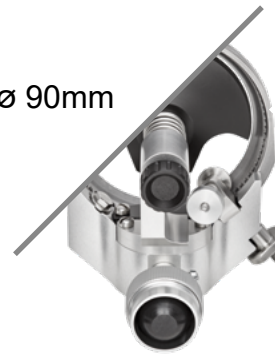


Ø 128mm



FREUND Maschinenfabrik GmbH & Co. KG

Schulze-Delitzsch-Str. 38
33100 Paderborn, GERMANY
mail@freund.eu

Fon: +49 5251 1659 -0
Fax: +49 5251 1659 -75
www.freund-germany.com



EN



ES



FR



NO



RU

